

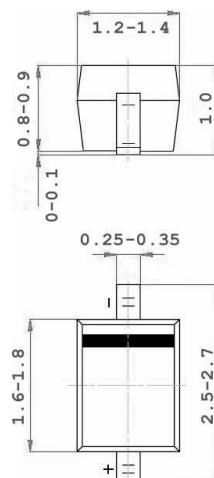
SWITCHING DIODE

VOLTAGE RANGE: 35 VOLTS

CURRENT: 100mA

FEATURES

- Small surface mounting type
- High speed
- Suitable for high packing density

MARKING: E**SOD-323**

UNIT:mm

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Parameters	Symbols	Limits	UNITS
Peak Reverse Voltage	V_{RM}	40	V
DC Reverse Voltage	V_R	35	V
Mean Rectifying Current	I_O	0.1	A
Peak Forward Surge Current	I_{FSM}	0.225	A
Junction Temperature	T_J	125	°C
Storage Temperature	T_{STG}	-55~+125	°C

ELECTRICAL RATINGS

Parameters	Symbols	Test conditions	Min.	Typ.	Max.	UNITS
Forward Voltage	V_F	$I_F=100\text{mA}$			1.2	V
Reverse Current	I_R	$V_R=20\text{V}$			15	nA
Capacitance between terminals	C_T	$V_R=0.5\text{V}, f=1\text{MHz}$			5	pF

www.s-manuals.com