

**Silicon Epitaxial Planar Transistor****2SD596****FEATURES**

- Micro package.
- Complementary to 2SB624 PNP Transistor.
- High DC current gain  $h_{FE}$ :200TYP.( $V_{CE}=1.0V, I_C=100mA$ )




Lead-free

**APPLICATIONS**

- Audio frequency general purpose amplifier applications.

**ORDERING INFORMATION**

Type No.	Marking	Package Code
2SD596	DV1/DV2/DV3/DV4/DV5	SOT-23

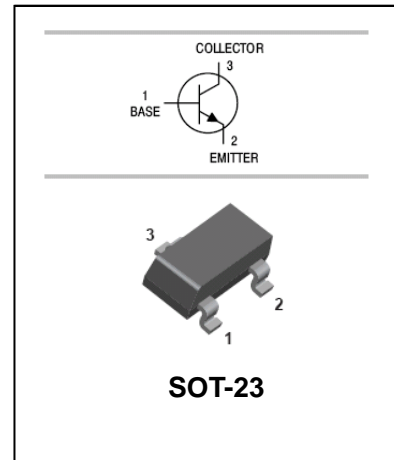**MAXIMUM RATING @ Ta=25°C unless otherwise specified**

Symbol	Parameter	Value	Units
$V_{CBO}$	Collector-Base Voltage	30	V
$V_{CEO}$	Collector-Emitter Voltage	25	V
$V_{EBO}$	Emitter-Base Voltage	5	V
$I_C$	Collector Current -Continuous	700	mA
$P_C$	Collector Dissipation	200	mW
$T_j, T_{stg}$	Junction and Storage Temperature	-55~150	°C

**Silicon Epitaxial Planar Transistor****2SD596****ELECTRICAL CHARACTERISTICS @ Ta=25°C unless otherwise specified**

Parameter	Symbol	Test conditions	MIN	TYP	MAX	UNIT
Collector-base breakdown voltage	$V_{(BR)CBO}$	$I_C=100\mu A, I_E=0$	30			V
Collector-emitter breakdown voltage	$V_{(BR)CEO}$	$I_C=1mA, I_B=0$	25			V
Emitter-base breakdown voltage	$V_{(BR)EBO}$	$I_E=100\mu A, I_C=0$	5			V
Collector cut-off current	$I_{CBO}$	$V_{CB}=30V, I_E=0$			0.1	$\mu A$
Emitter cut-off current	$I_{EBO}$	$V_{EB}=5V, I_C=0$			0.1	$\mu A$
DC current gain	$h_{FE}$	$V_{CE}=1V, I_C=100mA$ $V_{CE}=1V, I_C=700mA$	110 50	200	400	
Collector-emitter saturation voltage	$V_{CE(sat)}$	$I_C=700mA, I_B=70mA$		0.22	0.6	V
Base to Emitter voltage	$V_{BE}$	$V_{CE}=6V, I_C=10mA$	600	640	700	mV
Transition frequency	$f_T$	$V_{CE}=6V, I_E=-10mA$	170			MHz
Output capacitance	$C_{ob}$	$V_{CB}=6V, I_E=0, f=10kHz$		12		pF

**CLASSIFICATION OF  $h_{FE(1)}$** 







Range	110-180	135-220	170-270	200-320	250-400
Marking	DV1	DV2	DV3	DV4	DV5

**TYPICAL CHARACTERISTICS @ Ta=25°C unless otherwise specified**



# Silicon Epitaxial Planar Transistor

# 2SD596

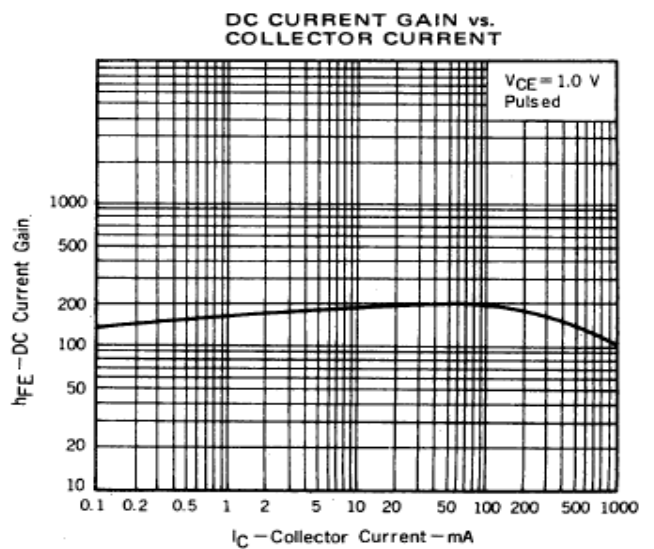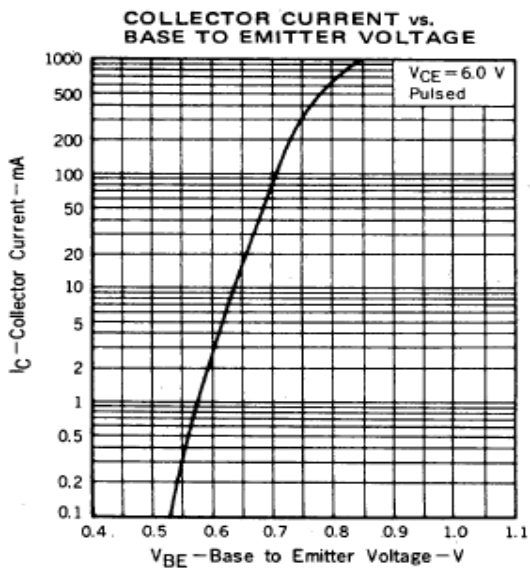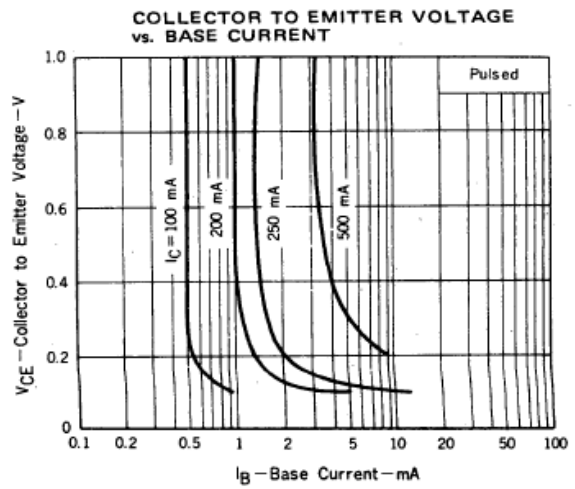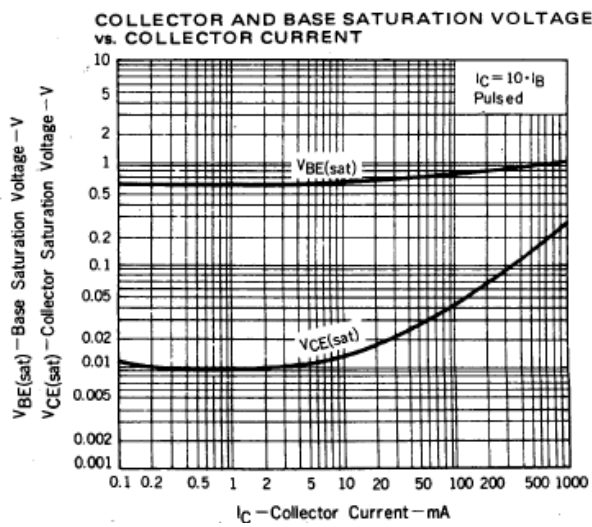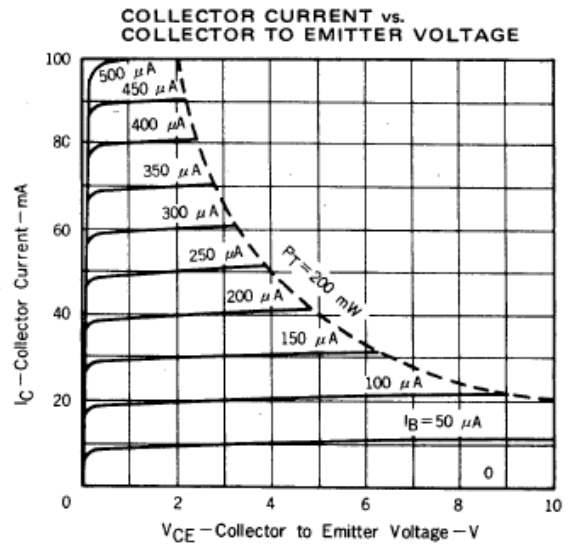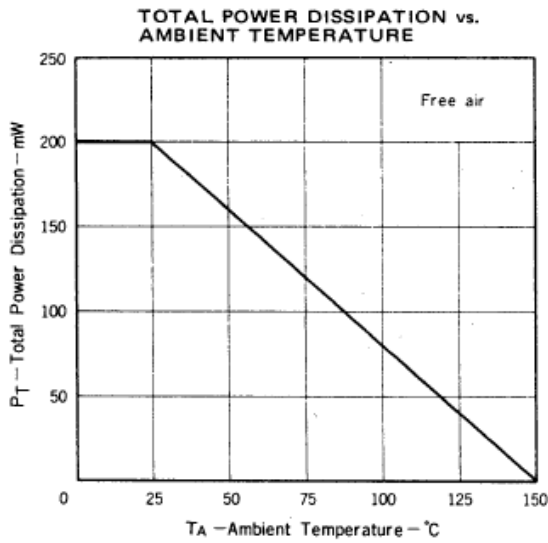




# Silicon Epitaxial Planar Transistor

# 2SD596


## PACKAGE OUTLINE

Plastic surface mounted package

SOT-23

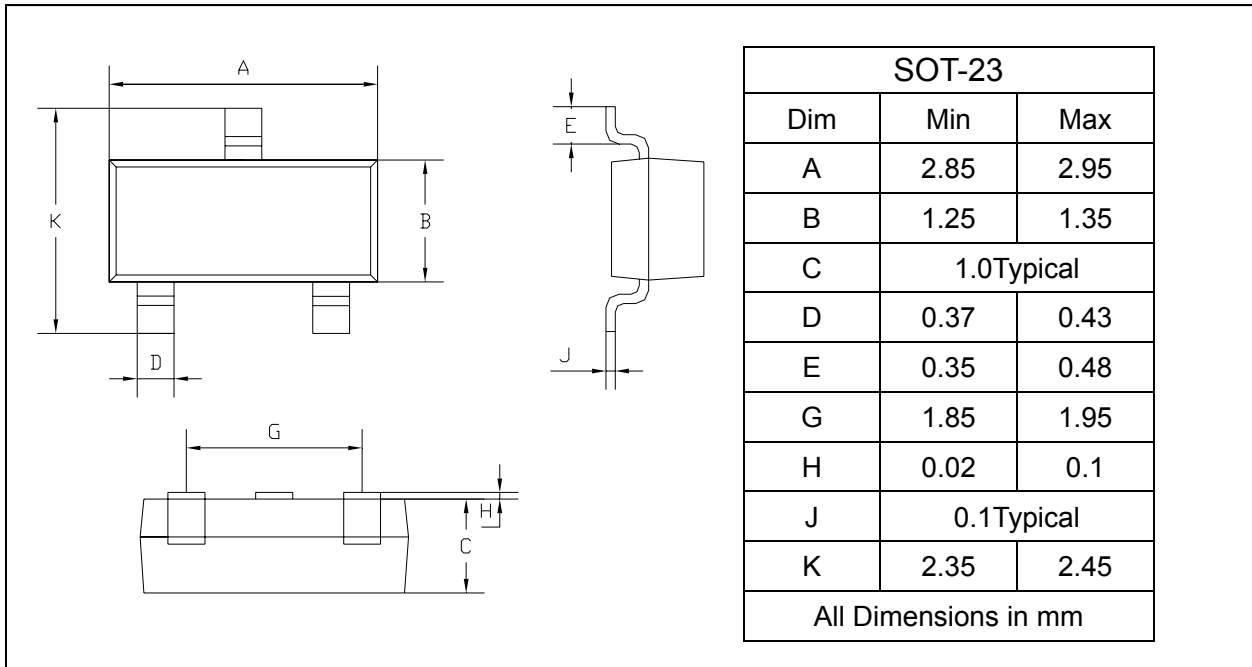

## SOLDERING FOOTPRINT

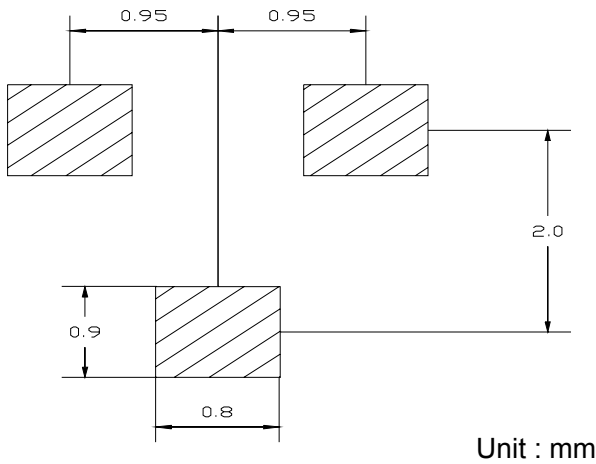

## PACKAGE INFORMATION

Device	Package	Shipping
2SD596	SOT-23	3000/Tape&Reel

[www.s-manuals.com](http://www.s-manuals.com)