


## PNP Silicon RF Transistor

**BF 660**

- For VHF oscillator applications

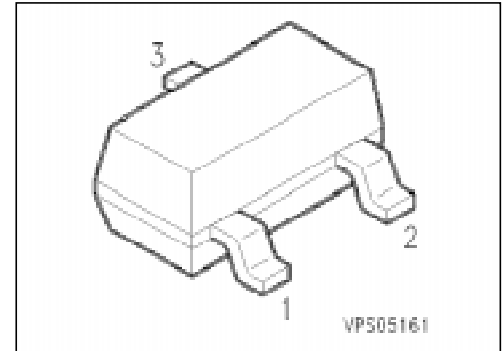

Type	Marking	Ordering Code (tape and reel)	Pin Configuration			Package <sup>1)</sup>
			1	2	3	
BF 660	LEs	Q62702-F982	B	E	C	SOT-23

### Maximum Ratings

Parameter	Symbol	Values	Unit
Collector-emitter voltage	$V_{CE0}$	30	V
Collector-base voltage	$V_{CB0}$	40	
Emitter-base voltage	$V_{EB0}$	4	
Collector current	$I_C$	25	mA
Emitter current	$I_E$	30	
Total power dissipation, $T_A \leq 25 \text{ }^\circ\text{C}$	$P_{tot}$	280	mW
Junction temperature	$T_j$	150	$^\circ\text{C}$
Storage temperature range	$T_{stg}$	- 65 ... + 150	

### Thermal Resistance

Junction - ambient <sup>2)</sup>	$R_{th \text{ JA}}$	$\leq 450$	K/W
----------------------------------	---------------------	------------	-----

<sup>1)</sup> For detailed information see chapter Package Outlines.

<sup>2)</sup> Package mounted on alumina 15 mm × 16.7 mm × 0.7 mm.

## Electrical Characteristics

at  $T_A = 25\text{ }^\circ\text{C}$ , unless otherwise specified.

Parameter	Symbol	Values			Unit
		min.	typ.	max.	


### DC Characteristics

Collector-emitter breakdown voltage $I_C = 1\text{ mA}, I_B = 0$	$V_{(BR)CE0}$	30	–	–	V
Collector-base breakdown voltage $I_C = 10\text{ }\mu\text{A}, I_E = 0$	$V_{(BR)CB0}$	40	–	–	
Emitter-base breakdown voltage $I_E = 10\text{ }\mu\text{A}, I_C = 0$	$V_{(BR)EB0}$	4	–	–	
Collector cutoff current $V_{CB} = 20\text{ V}, I_E = 0$	$I_{CB0}$	–	–	50	nA
DC current gain $I_C = 3\text{ mA}, V_{CE} = 10\text{ V}$	$h_{FE}$	30	–	–	–

### AC Characteristics


Transition frequency $I_C = 5\text{ mA}, V_{CE} = 10\text{ V}, f = 100\text{ MHz}$	$f_t$	–	700	–	MHz
Collector-base capacitance $V_{CB} = 10\text{ V}, V_{BE} = 0\text{ V}, f = 1\text{ MHz}$	$C_{cb}$	–	0.6	–	pF
Collector-emitter capacitance $V_{CE} = 10\text{ V}, V_{BE} = 0\text{ V}, f = 1\text{ MHz}$	$C_{ce}$	–	0.28	–	

### Total power dissipation $P_{tot} = f(T_A)$

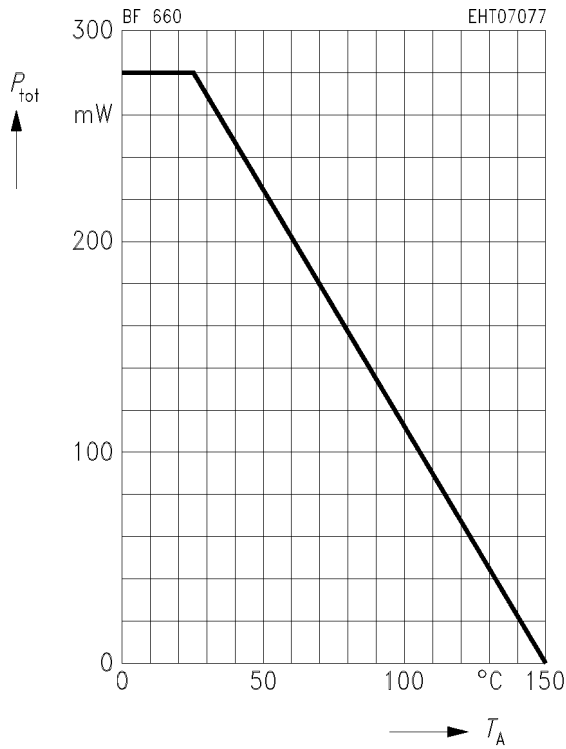


### Transition frequency $f_T = f(I_C)$

$V_{CE} = 10\text{ V}, f = 100\text{ MHz}$

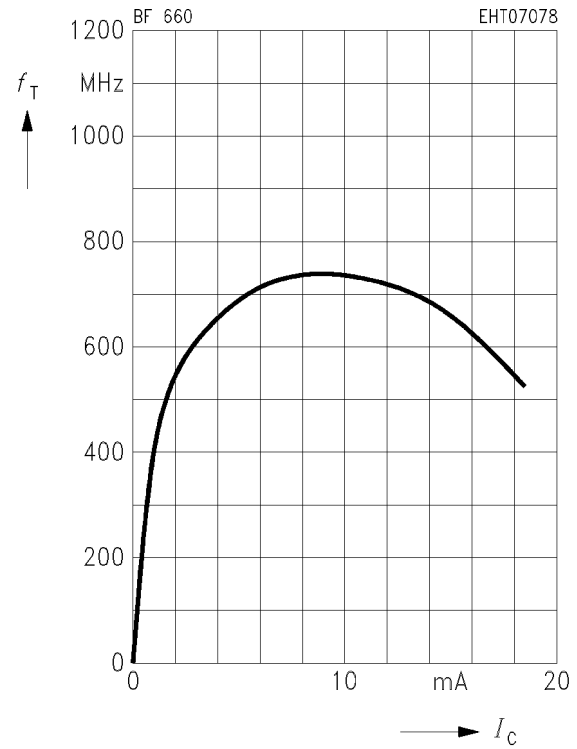

### Collector-base capacitance $C_{cb} = f(V_{CB})$

$f = 1\text{ MHz}$

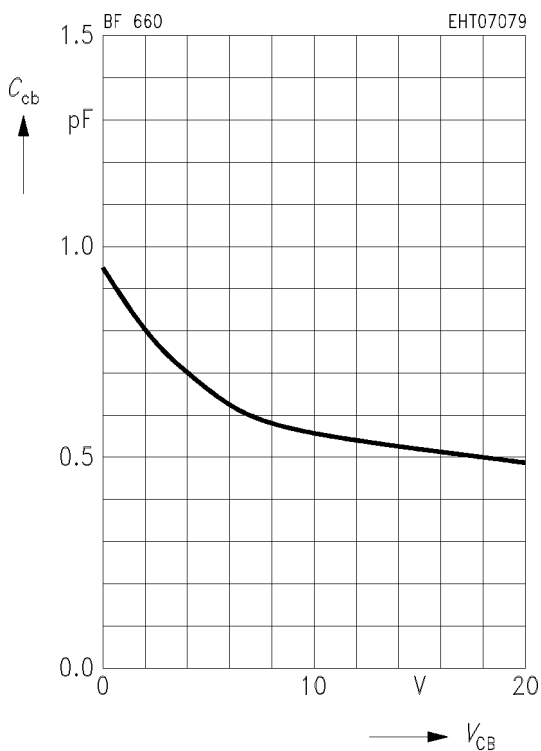

[www.s-manuals.com](http://www.s-manuals.com)