

GENERAL PURPOSE APPLICATION.


FEATURES

- 1W (Mounted on Ceramic Substrate).
- Small Flat Package.
- Complementary to KTD1898.


MAXIMUM RATING (Ta=25 °C)

CHARACTERISTIC	SYMBOL	RATING	UNIT
Collector-Base Voltage	V_{CBO}	-80	V
Collector-Emitter Voltage	V_{CEO}	-80	V
Emitter-Base Voltage	V_{EBO}	-5	V
Collector Current	I_C	-1	A
Emitter Current	I_E	1	A
Collector Power Dissipation	P_C	500	mW
	P_C^*	1	W
Junction Temperature	T_j	150	°C
Storage Temperature Range	T_{stg}	-55 ~ 150	°C

* Mounted on ceramic substrate(250mm² × 0.8t)

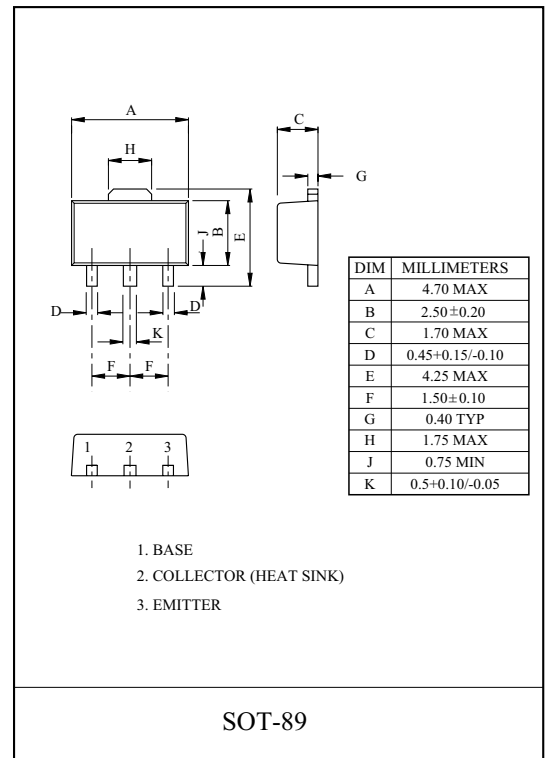

Marking






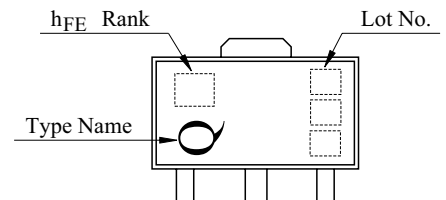


ELECTRICAL CHARACTERISTICS (Ta=25 °C)

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Collector Cut-off Current	I_{CBO}	$V_{CB} = -60V, I_E = 0$	-	-	-1	μA
Emitter Cut-off Current	I_{EBO}	$V_{EB} = -4V, I_C = 0$	-	-	-1	μA
Collector-Emitter Breakdown Voltage	$V_{(BR)CEO}$	$I_C = -1mA, I_B = 0$	-80	-	-	V
DC Current Gain	$h_{FE}(\text{Note})$	$V_{CE} = -3V, I_C = -100mA$	70	-	400	
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C = -500mA, I_B = -50mA$	-	-	-0.4	V
Transition Frequency	f_T	$V_{CE} = -5V, I_C = -50mA, f = 30MHz$	-	100	-	MHz
Collector Output Capacitance	C_{ob}	$V_{CB} = -10V, I_E = 0, f = 1MHz$	-	25	-	pF


Note : h_{FE} Classification O:70 ~ 140, Y:120 ~ 240, GR:200 ~ 400

KTB1260

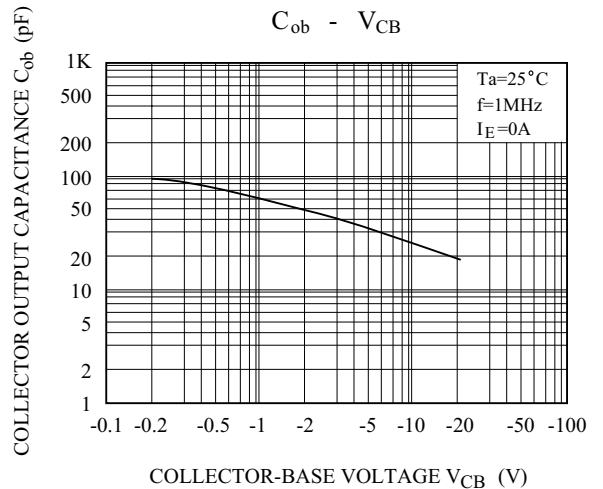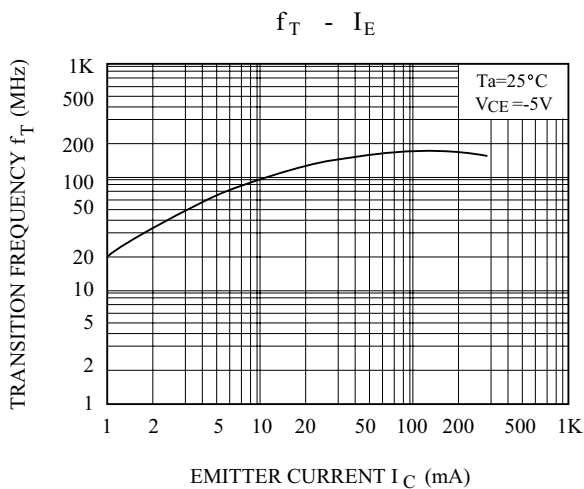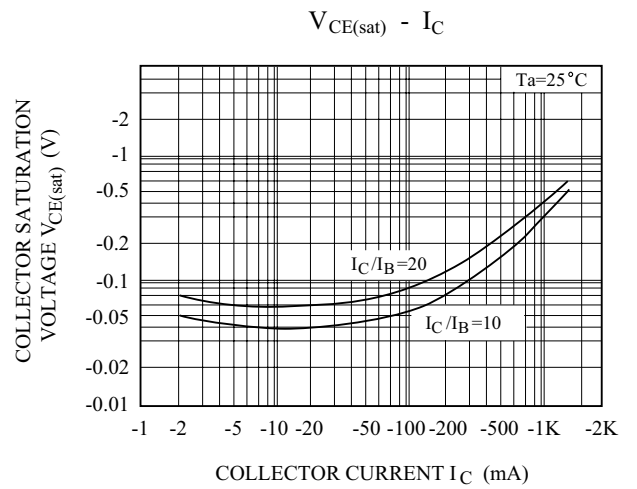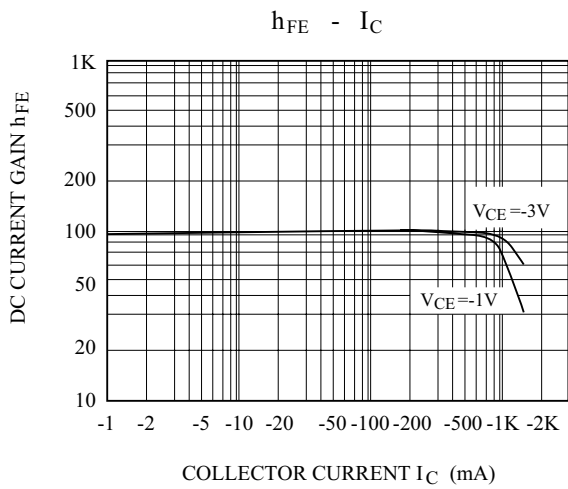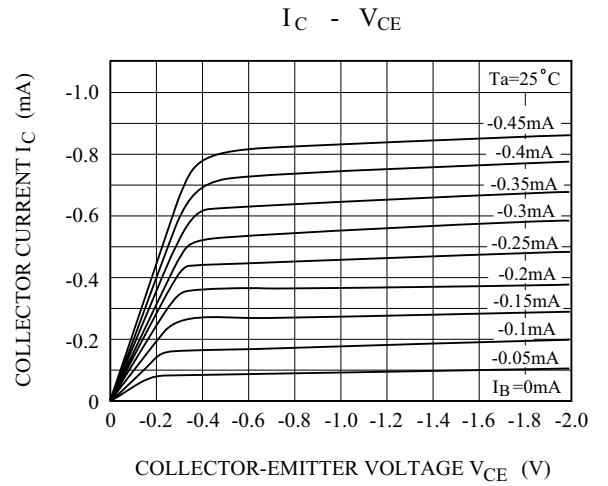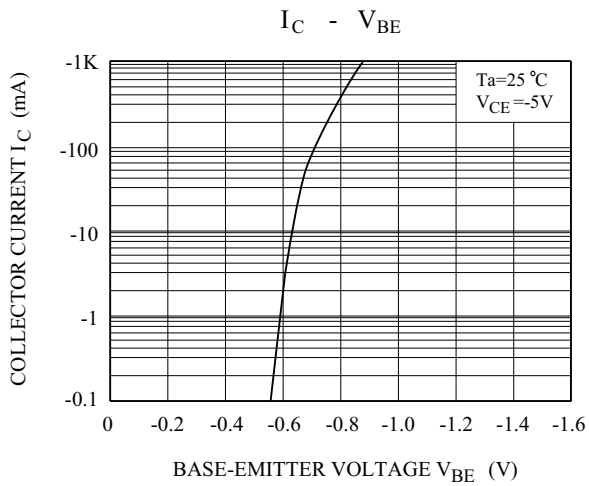


KTB1260

SAFE OPERATING AREA

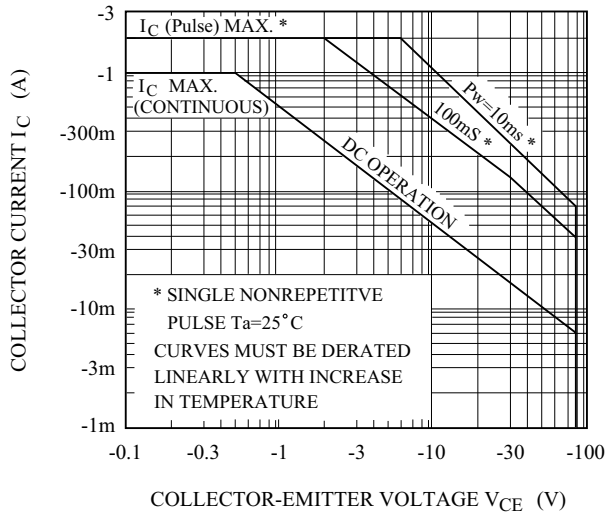

$P_c - T_a$

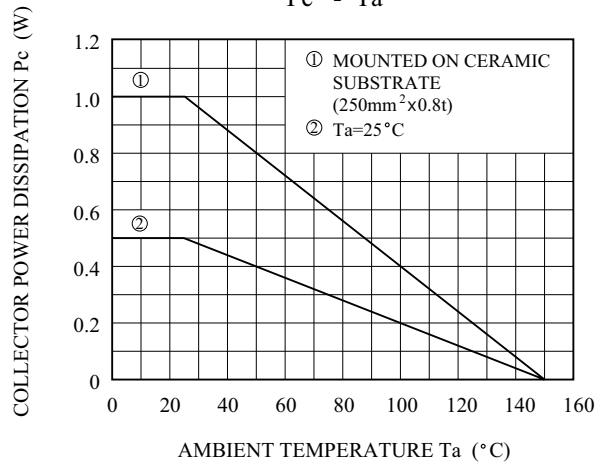

www.s-manuals.com