


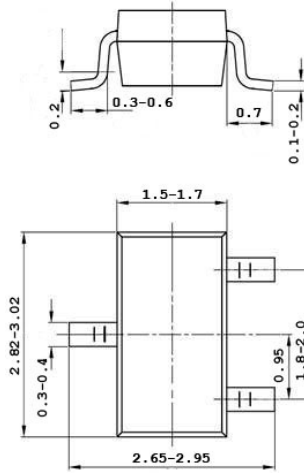

SCHOTTKY BARRIER DIODE

VOLTAGE RANGE: 40 VOLTS

CURRENT: 100mA

FEATURES

- Small surface mounting type
- Low reverse current and low forward voltage
- High reliability


MARKING: D3L
SOT-23-3L


Unit: mm

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Parameters	Symbols	Limits	UNITS
Peak Reverse Voltage	V_{RM}	40	V
DC Reverse Voltage	V_R	40	V
Mean Rectifying Current	I_o	100	mA
Peak Forward Surge Current	I_{FSM}	1	A
Junction Temperature	T_{ij}	125	°C
Storage Temperature	T_{stg}	-40~+125	°C

ELECTRICAL RATINGS

Parameters	Symbols	Test conditions	Min.	Typ.	Max.	UNITS
Forward Voltage	V_{F1}	$I_F=100mA$			0.55	V
	V_{F2}	$I_F=10mA$			0.34	V
Reverse Current	I_R	$V_R=10V$			30	μA
Capacitance Between Terminals	C_T	$V_R=10V, f=1MHz$		6		pF

www.s-manuals.com